


# Material data sheet

## **ALU/BT and ALU/HT**

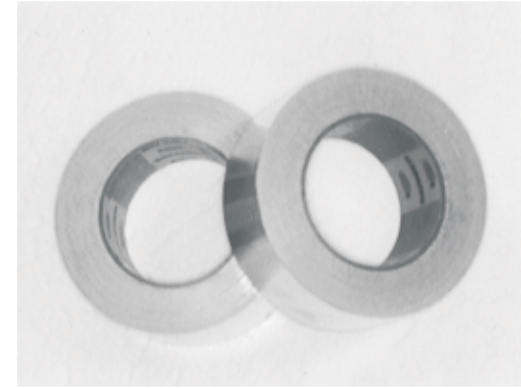

---

## TECHNITRACE

Aluminium adhesive tape used for a continuous covering and fixation of the heating cable on the surface to heat.

Thermal dissipation of the heating cable should be largely better using this tape (rate : 25 to 45 W/°C.m<sup>2</sup>)

Dimensions : 50 mm large \* 50 meters long +/- 10 %  
(other dimensions upon request)

ALU/BT : maximum exposure : 105°C

ALU/HT : maximum exposure : 150°C