


Material data sheet

POLY and FV 200

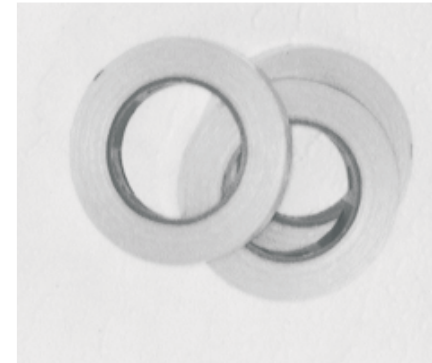

TECHNITRACE

Adhesive tape used for fixing the heating cables on the circular surface to heat (pipes, ballons and tanks)
(rate from 7 to 15 W/°C.m²)

Approx : 19 mm large

length per reel : 50 m +/- 10%

POLY : polyester (temperature exposure until 65°C)

FV200 : armed fiber glass (temperature exposure until 200°C)