


Material data sheet

THD

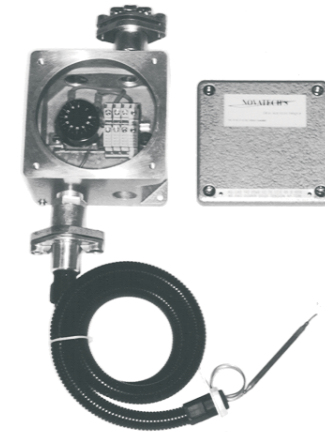

TECHNITRACE

Surface thermostat inclosed in a EEx'd' box for hazardous area uses
rate of temperature from 0 to 90°C or 35 to 210°C
capillary protection with a plastic and flexible tube
type SC/FLEX + stainless steel sheet
maxi intensity = 16 / 230 V
Eex'd'' IIC T6 - ATEX
dimensions - 140*140*89 mm
4 holes 3/4"NPT + 2 caps 3/4"NPT
+ 1 gland 3/4"NPT + 1 hole free 3/4" NPT